




Super Silent Pumps

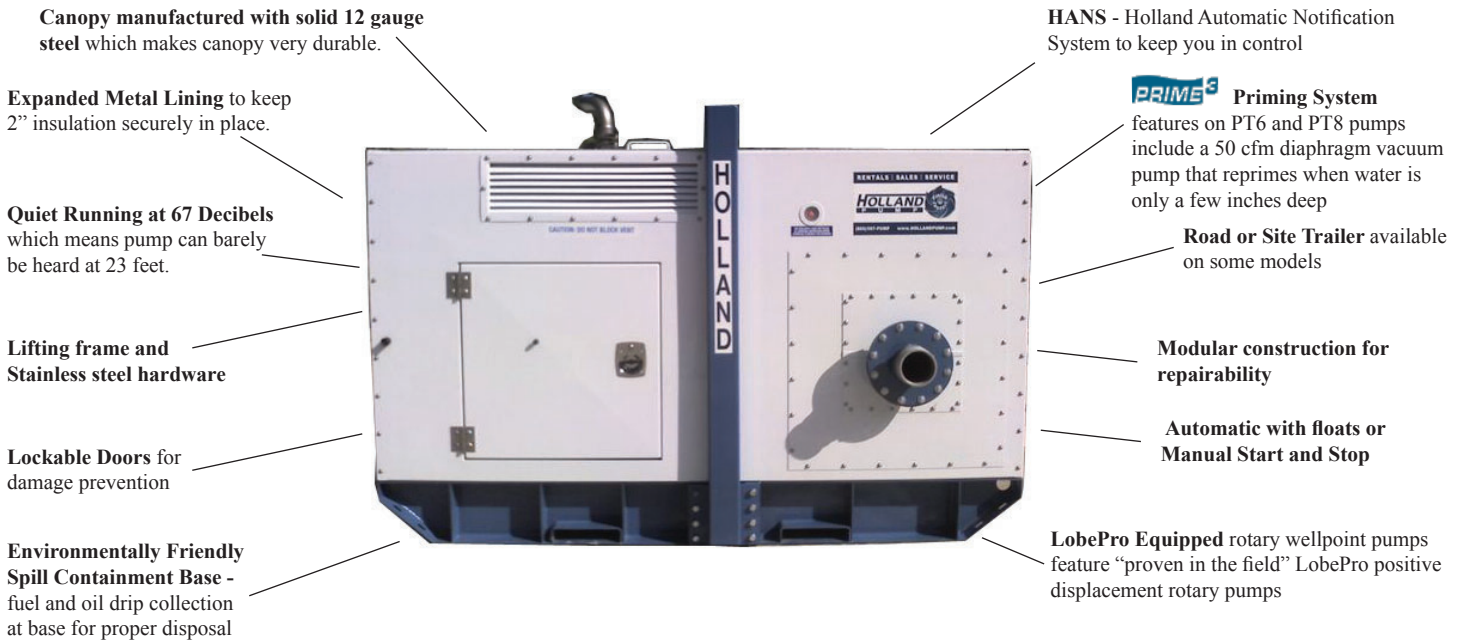

Super Silent Pumps maintain noise levels at not more than 67 decibels at 23 feet using the rigorous Contractor's Pumps Bureau Test Method.*


Models

Applications

Suction Pump Model	Pump Size	Max Head	Solid Size	Fuel used @ 1,800 rpm (gph)	Max GPM
PT4TMS-SA	4"	120'	3"	1.25	780
PT6TPA-SA	6"	140'	3"	1.45	1,300
PT8TPA-SA	8"	135'	3"	1.7	2,600
PT8TPC-SA	8"	200'	3"	2.5	2,600
PT10TPC-SA	10"	255'	3.38"	7.6	4,200
PT14TPB- SA	14"	200'	3"	8.8	8,500
PT18TPD- SA	18"	240'	4.5"	15.75	16,000
Wellpoint Pump Model	Pump Size	Max Head	Solid Size	Fuel used @ 1,800 rpm (gph)	Max GPM
W6R-SA	6"	57'	1.5"	.45	500
W8R-SA	8"	57'	2.5"	0.8	1,300
W12R-SA	12"	57'	2.5"	1.6	2,600

Minimize neighborhood complaints and meet municipal requirements with a Super Silent pump. Featuring indefinite dry run capabilities, automatic self-priming, optional self start and DOT trailers, Super Silent Pumps maintain noise levels at not more than 67 decibels at 23 feet using the rigorous *Contractor's Pumps Bureau Test Method.** Super Silent suction lift sewer bypass models are available at Holland Pump in four inch, six inch, and eight inch sizes to accommodate a wide range of applications. W6R, W8R and W12R Super Silent Rotary Wellpoint Pumps feature valve assisted pressure regulation for sock applications.

***Contractors Pump Bureau Method -** Pump placed in middle of concrete paved area. Sound level checked from all four corners and the middle of each side from 23 feet while pump is operating at full speed and then averaged.

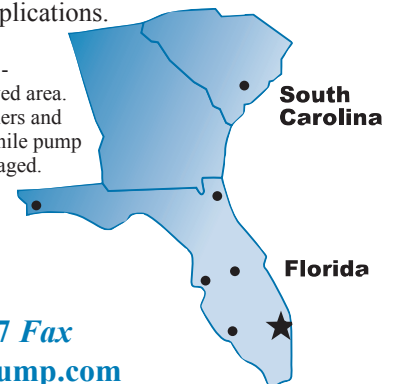

7312 Westport Place • West Palm Beach, FL 33413
 1-800-451-0769 Toll Free • (561) 697-3333 Telephone • (561) 683-7247 Fax
 For a list of branch locations and online part sales visit: www.hollandpump.com

Sales • Rentals • Service